

# **DIRT Bag™**


## Assembly & Use

**For more information:**

937-458-0210 | [www.dirtbagrepair.com](http://www.dirtbagrepair.com)

# Contents

---

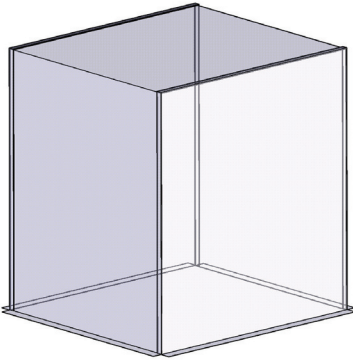

25 - DB4448-B Plastic covers

# Assembly

---

1. Remove the paper backing from the DB-HP1 hand port adhesive rings (sold separately).
2. Push the hand ports onto the DIRT Bag such that the repair site is easily accessed.
3. Cut away the plastic film behind each hand port to allow passage into the bag.
4. Attach the DB-OP1 hose port and DBF1 filter (sold separately) in a convenient location, following the same procedure as steps 1-3.

# Use

---

1. Clean and dry work area.
2. Place DB4448-F frame (sold separately) over flat work area.
3. Slide DB4448-B plastic cover over frame.
4. Remove the paper backing from the bottom adhesive ring of the DIRT Bag.
5. Press the adhesive tightly around the work site.
6. Perform the operation/repair.
  - Work piece may be inserted into work area through detachable bag sides.
  - Hoses and wires may be inserted through the hose ports and tools and materials can pass through the DIRT Bag by opening the attached material passageway.
  - Larger work areas can be made by connecting two assemblies together at the bag sides via the hook and loop fasteners. Pay attention to the orientation of the cover to ensure the fasteners mate (i.e. hook to loop, not loop to loop).

**Manufactured by:**  
CRG Industries, LLC  
2750 Indian Ripple Rd. Dayton, Ohio 45440